


DV2530



5-segment light tower with IO-Link control

LED-Tower-5/IO-Link/Buzzer

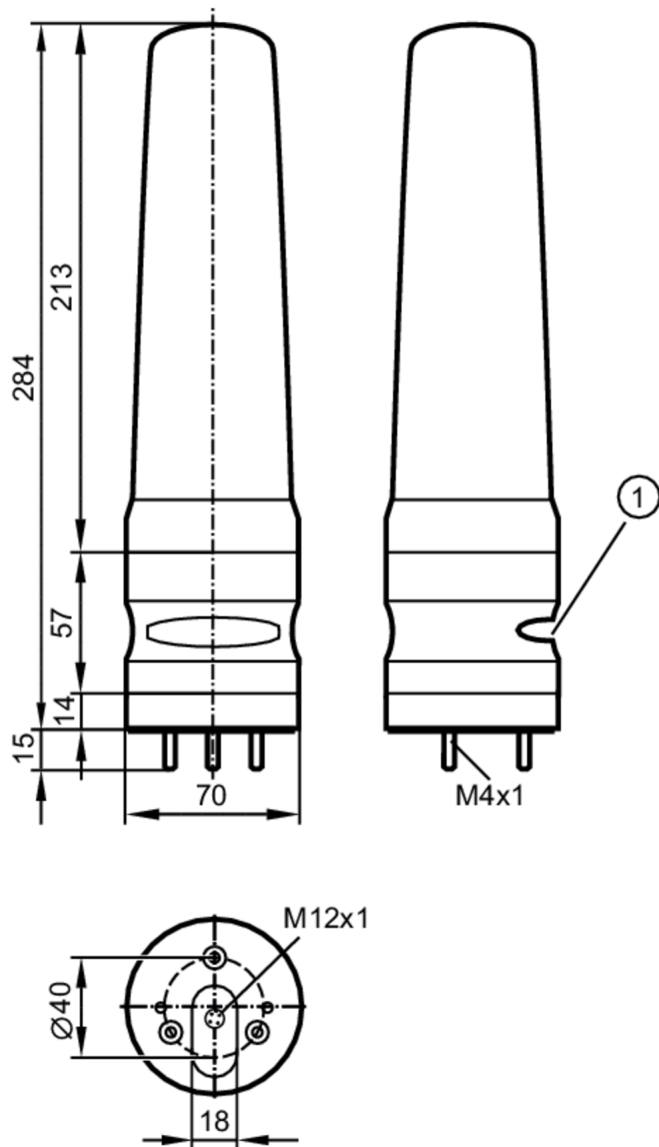

1 buzzer



Application

Application: signalling machine conditions

Electrical data

Operating voltage	[V]	18...30 DC; (to SELV/PELV)
Nominal voltage DC	[V]	24
Current consumption	[mA]	< 200

Inputs

Input current High	[mA]	6
--------------------	------	---

Interfaces

Communication interface	IO-Link
Transmission type	COM2 (38,4 kBaud)



5-segment light tower with IO-Link control

LED-Tower-5/IO-Link/Buzzer

IO-Link revision	1.1				
SDCI standard	IEC 61131-9				
SIO mode	yes				
Required master port type	A				
Min. process cycle time [ms]	3.2				
Supported DeviceIDs	<table> <tr> <th>Type of operation</th><th>DeviceID</th></tr> <tr> <td>default</td><td>841</td></tr> </table>	Type of operation	DeviceID	default	841
Type of operation	DeviceID				
default	841				

Operating conditions

Ambient temperature [°C]	-25...50
Storage temperature [°C]	-40...75
Max. relative air humidity [%]	90
Air pressure [kPa]	< 106
Max. height above sea level [m]	2000
Protection	IP 54

Mechanical data

Weight [g]	563.5
Dimensions [mm]	Ø 70 / L = 284
Materials	housing: ABS; lens: PC

Displays / operating elements

Display	LED segment	5 x 4 LED
Acoustic signal	buzzer	
Max. sound pressure [dB]	85	

Accessories

Accessories (optional)	mounting base, E89060
	wall bracket, E89061
	Mounting adapter, E89063
	bracket with lateral cable entry, E89064
	mounting tube, E89065
	mounting tube, E89066
	mounting tube, E89067

Remarks

Remarks	For further information please see the operating instructions.
Pack quantity	1 pcs.

DV2530



5-segment light tower with IO-Link control

LED-Tower-5/IOL/Buzzer

Electrical connection - plug

Connector: M12; coding: A



1	UB+
2	not used
3	UB-
4	IO-Link (C/Q)

Diagrams and graphs

wall mounting



DV2530



5-segment light tower with IO-Link control

LED-Tower-5/IO-Link/Buzzer

base mounting

